



# Snelkoppeling Euro 3/8" buitendraad in blister

## Product Images








## EURO

European profile  
7.2 mm  
Flow rate at 6 bar:  
1820 l/min



<b>L1</b>	5 mm
<b>L2</b>	11 mm
<b>A</b>	∅ 10 mm
<b>B</b>	∅ 12 mm
<b>C</b>	∅ 10 mm
<b>D</b>	∅ 12 mm

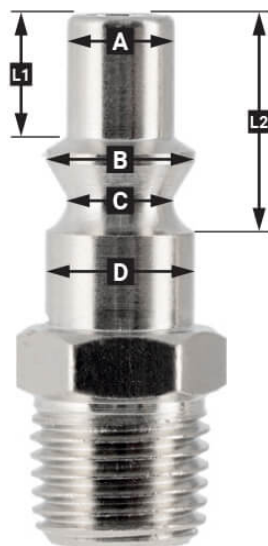

## Type ORION

Type Orion ARO  
210 profile  
6 mm  
Flow rate at 6 bar:  
800 l/min



<b>L1</b>	8.5 mm
<b>L2</b>	16 mm
<b>A</b>	∅ 8 mm
<b>B</b>	∅ 11 mm
<b>C</b>	∅ 8 mm
<b>D</b>	∅ 11 mm

